

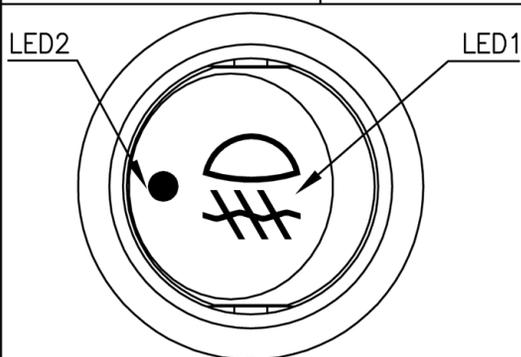
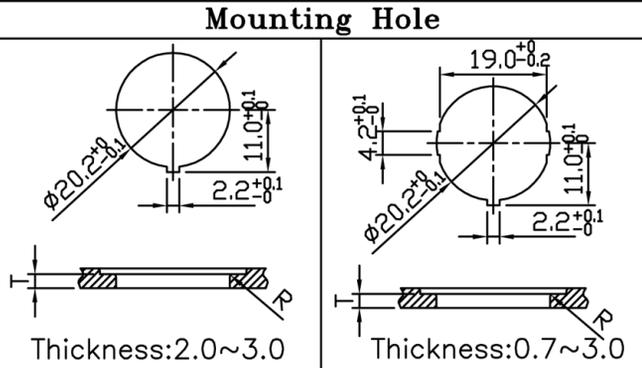
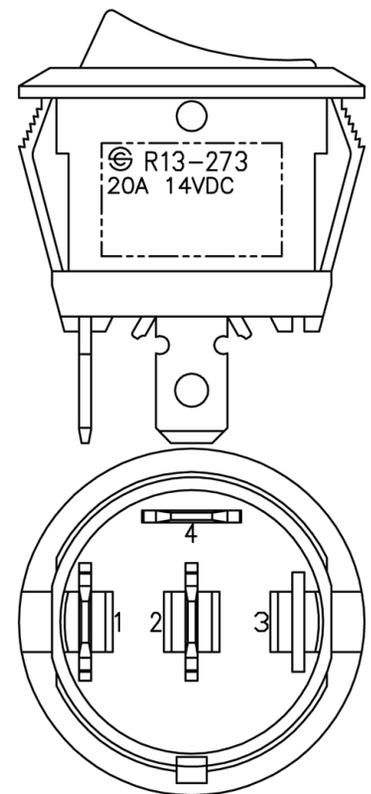
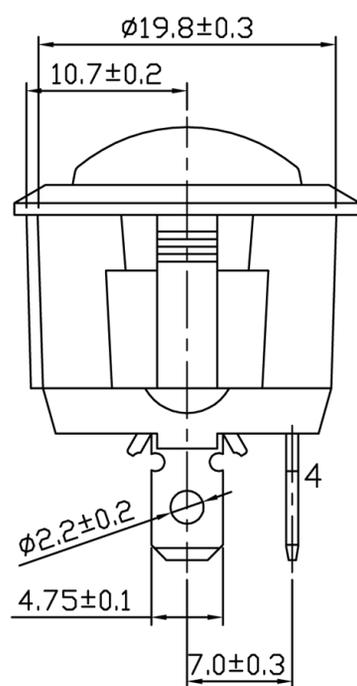


Rating	20A 14VDC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-25°C~85°C
Function Switch	3P SPST ON-OFF (2 LEDS)

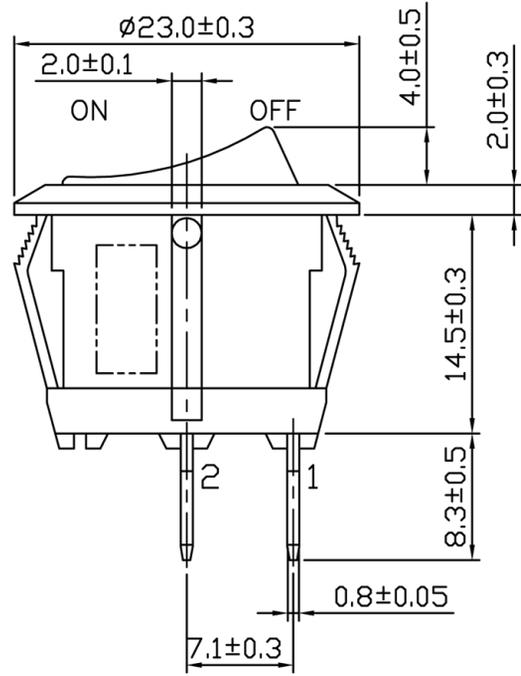

**MATERIAL:**  
 Frame: Black, Nylon-66  
 Actuator: White diffused, PC with Black painting  
 LED1: Yellow light (alwats on)  
 LED2: Red light (when load is on)



Date		Name		Description			NO
Drawn	Checked	Approved	SCI BOM No.	Model Name	ROCKER SWITCH		
曹盈芳			Customer No.	Model No.	47041		
05/04/'09			Unit	mm	STUALARM IMPORT, s.r.o.		
							REV.
							0